



GOVERNMENT OF INDIA
CENTRAL WATER COMMISSION
INDRAVATI SUB-DIVISION
KUMHARPARA
Jagdalpur, Pin-494001

& : (07782) 228680 (O),
☎ : (07782) 228680

No: ISD/A-6 /2015-16/469-73

Date: 30.06.2015


NOTICE INVITING QUOTATIONS

Sealed quotations are hereby invited by the undersigned on behalf of the president of India for the work of "Reinstallation of missing gauge posts 10 Nos. at Site Amabal under ISD/Jagdalpur" from the approved and eligible contractors of CPWD/State Irrigation/PWD Departments so as to reach in the office of the undersigned on or before **08.07.2015 at 14:30 hrs.** The quotations will be opened on the same day at **15:00 hrs** in presence of the quotationers or their authorized representative.

S.No.	Name of work and Location	Approximate value of work	EMD	Time allowed
1.	Reinstallation of missing gauge posts 10 Nos. at Site Amabal under ISD/Jagdalpur	Rs. 37000/-	Rs.740/- (Rupees seven hundred and forty only)	1 Month

TERMS & CONDITIONS:

1. The sealed cover containing the quotation should be superscripted with the words "Reinstallation of missing out gauge posts 10 Nos at Site Amabal under ISD, Jagdalpur due date on 08/07/2015.
2. EMD of Rs.740/- (Rupees seven hundred and forty only) in the form of DD/ Bankers cheque drawn in favour of Executive engineer, lower Godavari Division , CWC, Hyderabad should be enclosed along with the quotation.
3. The quotation should be addressed to the **Sub Divisional Engineer, Indravati Sub Division, Central water Commission, Kumharpara, Jagdalpur, Chhattisgarh state, Pin-494001.**
4. The work should be completed within 1 month of work order placed. No time extension will be given for completion of the work until and unless beyond the control of human beings.
5. Rates should be mentioned, inclusive of all taxes, levies, transportation, loading, unloading and stacking of materials and providing necessary labour, materials , equipments
6. The rates quoted should be valid at least for a period of three months from the date of opening of the quotation.
7. No T&P, materials for any work including scaffolding/shuttering, will be provided by this department for the above work.
8. All the material should be get approved by the undersigned.
9. Quotations for part of the materials will be rejected.
10. All the corrections/ over writing should be duly attested. Failing which the quotation will be disqualified.

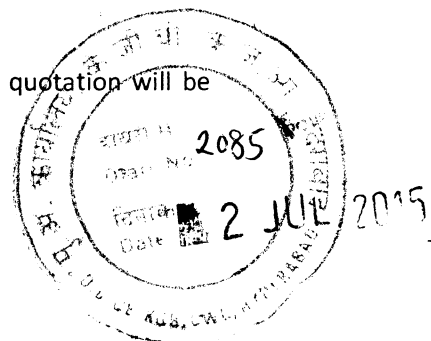

11. The contractor should submit their registration certificate along with their PAN.
12. The department is not responsible for any accidents/losses to the workers engaged in this work.
13. Payment will generally be made by Account payee cheque/Demand draft drawn on SBI, Red Hills, Hyderabad after completion of work satisfactorily and on submission of bill in triplicate.
14. The payments will be made on actual measurements only.
15. TDS shall be deducted from the bill at the time of payment as per the Govt. orders in force.
16. The Security Deposit @ 10% of the bill amount shall be deducted from the bill and will be released after 6 months from the date of the completion of the work and on satisfaction of the work done.
17. Labour cess @ 1 % will be deducted from the Gross Bill.
18. The undersigned reserves the right to reject a part or the whole of quotation without assigning any reason thereof.

Labelled 30/6/15
Sub Divisional Engineer
In-charge, CWC, Jagdalpur
Central Water Commission
MODALP-19-2001

Copy for information to:

- 1) The Superintending Engineer, Godavari circle, CWC, Hyderabad for information with a request to upload the same in CPP portal.
- ✓ 2) The Deputy Director O/o The Chief Engineer, K&GBO, CWC, Hyderabad for uploading the same in KGBO website.
- 3) The Executive Engineer, LGD, CWC, Hyderabad for information.
- 4) The Accounts Branch, LGD, CWC, Hyderabad.
- 5) Notice Board.

Schedule of Quantities

**Name of Work: Detailed Cum Abstract Estimate for reinstallation of missing Gauge Posts 10
Nos. at site Amabal under ISD/Jagdapur**

S.No	Description of Equipment	Quantity	Unit	Rate	Per	Amount in Figures	Amount in words
a	Fabrication and installation of gauge posts at river banks including cost of civil works in foundation embedded in 1:2:4 RCC pedestal blocks of size 60 cmx60 cm x 60 cm including the cost of steel reinforcements, centering, shuttering, finishing, reinforcement over the 1:4:8 CC base of size 80 cmx80 cmx15 cm with 12 mm thick plastering complete and marking the gauge with synthetic enamel with standard metric gradation of 5 mm thickness in black & white alternatively & red synthetic enamel of 5 mm of width at every 100 mm etc complete. Reinforced cement concrete gauge post of size 15 cmx10 cm (one side tapered in 5 cm length) made with 1:2:4 concrete mix 1.8 m long at Site Amabal	10	No		No		
	Subtotal						
	Labour Cess 1 % on Subtotal (mandatory)						
	Vat 5 % on Subtotal (mandatory)						
	Grand total						

Signature of Contractor